



TRAFFICPLUS⁺

Ultra Resistant Flooring



www.nylsol.ma

 VOLINE
wall and floor covering


PRÉSENTATION

Nylosol Revêtement sol et mur propose un large éventail de solutions de revêtement de sol souple et mural avec une large gamme de couleur sous différents aspects et effets.

Découvrez nos sols qualité et design dernière génération SPC Click system dotés d'une sous couche isolante et les lames LVT disponibles en effet parquet bois résistant à l'eau, marbre, béton et céramique. Les lames ultra résistantes sont adaptées à différentes utilisations résidentielles et commerciales de faible à fort Traffic et 100% Waterproof.

Nylosol répond aux besoins spécifiques et apporte de nombreuses solutions à tous types de revêtement et protection de sols.

Avec Nylosol, nous vous assurerons de répondre à vos besoins de revêtement et de vous accompagner dans la réalisation de vos projets.

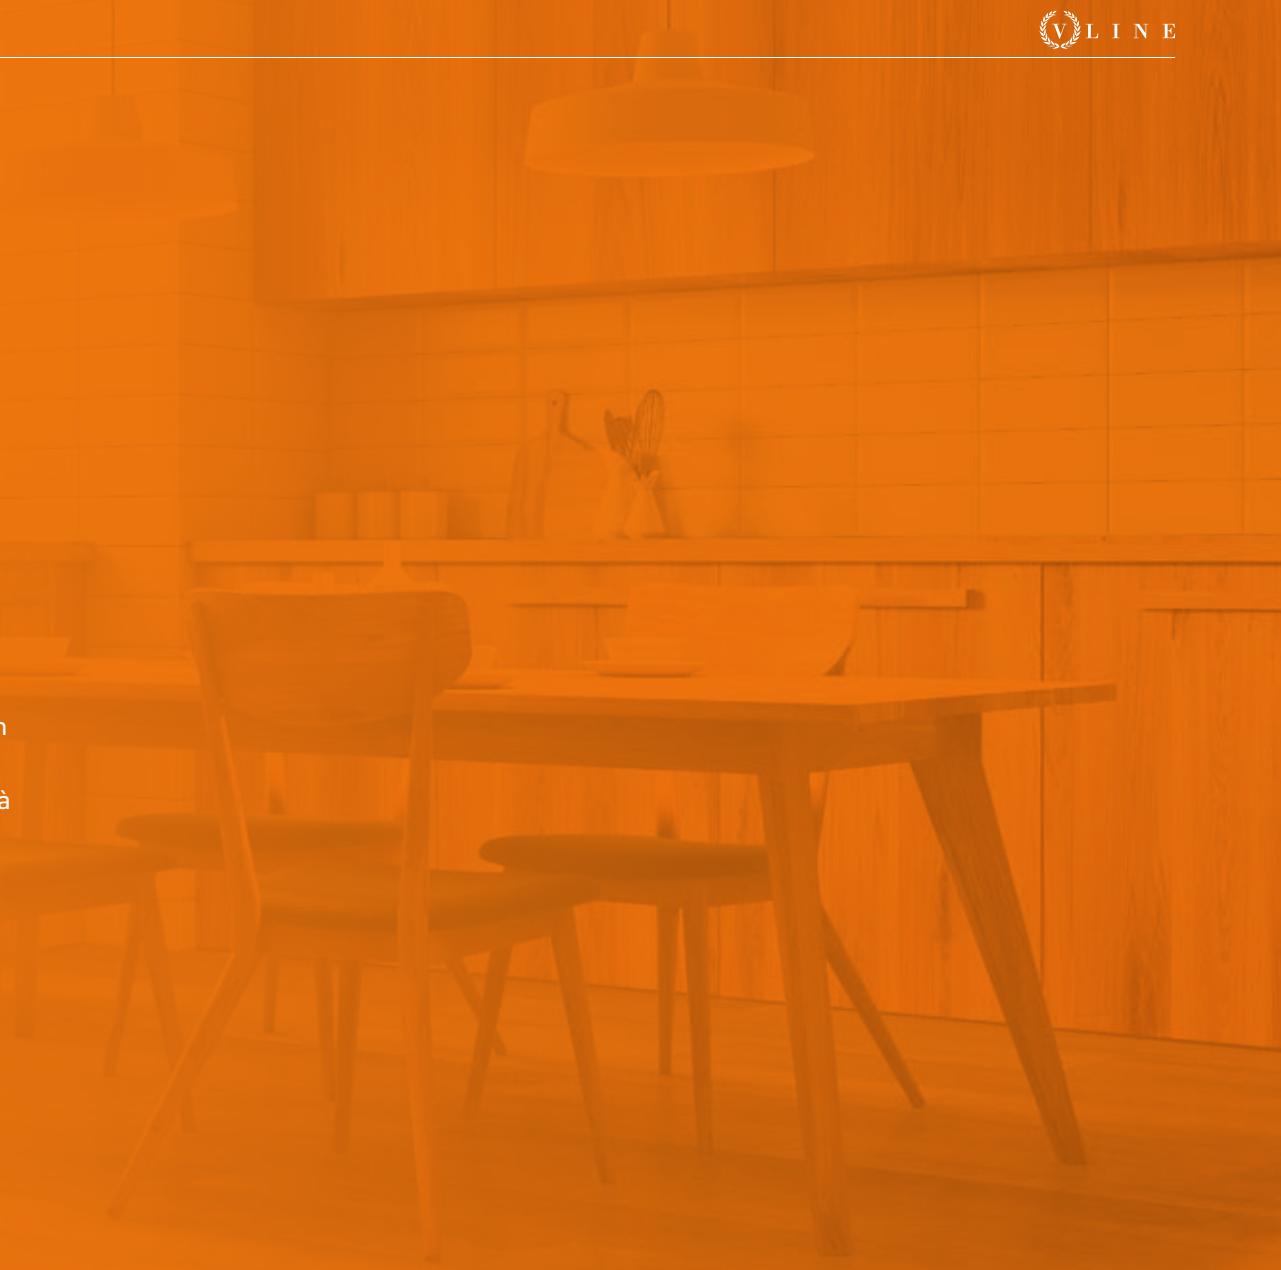




Structure

2. High resistance PU protective layer


Composed by ceramic micro pearls, avoids the wear and guarantees an extreme durability and acts as an extra protector layer.

3. PVC decorative layer

The superior layer of vinyl is the designed element to give style to this technic pavement. It is composed by the highest quality virgin vinyl.



Perfect thickness.
Only 6 mm of thickness.

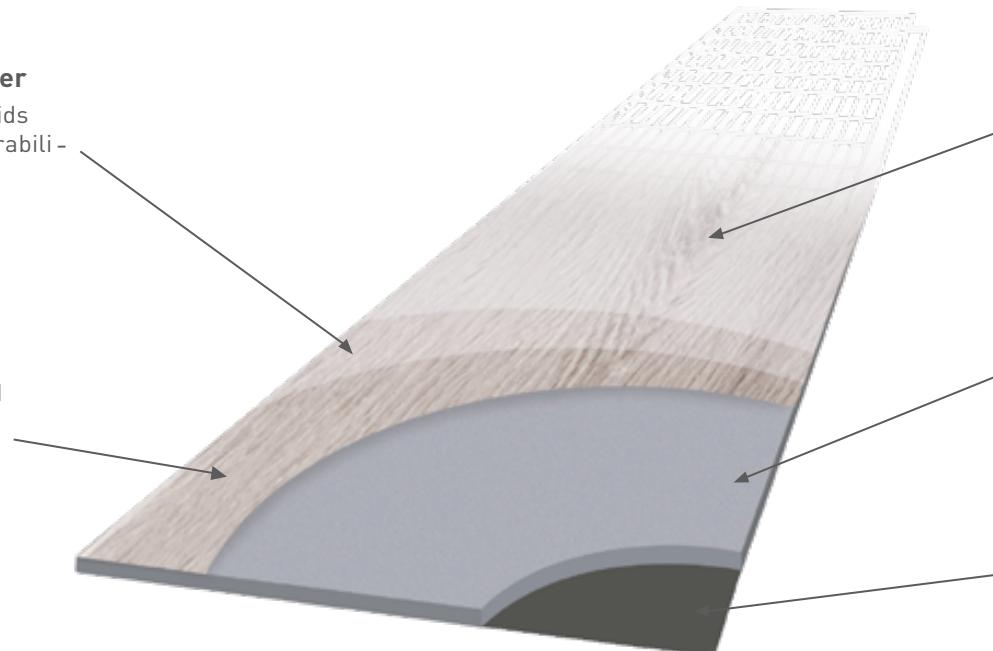

1. UV Coating extra-dur

Adds maximum resistance to UV from the sun, the colours keep stable without tarnish. This superior layer avoids the deterioration due to scratches, stains or clefts.

4. SPC Core


The SPC Core is characterised for being dense, 100% waterproof with the guarantee of resistance against expansion and shrinkage.

5. EVA backing with high density PE

Adaptable to small imperfections of the subfloor providing damping which can be installed on any substrate. It is resistance to humidity and temperature changes.



Benefits and advantages



High Stability Core.

Its dense core avoids deformationas in expansion phase (23 °C to 45 °C) and shrinkage (23 °C to 5 °C).



Good fire behavior.

Its BFL-s1 classification makes suitable to be installed in commercial areas.



100% Water resistant.

Can be installed in damp areas, like bathrooms and kitchens.



Comfort and sound insulation.

The vinyl wear layer provides cushion and absorbs the impact sound to make it a quiet floor.



High impact resistance.

The SPC composition provide a significant rigidity and great resistance to impact and denting.



Temperature changes resistant.

Designed to support the extreme temperatures of each season.



Easy to install Unilin click system.

High performance click system, strong and traction resistant which makes the installation faster without necessity of glue.



Ready for heavy use.

Material indicated to floors with a constant use (public and residential areas). Wear layer: 33/42.

**Ecofriendly materials.**

The different raw materials in its composition are free of formaldehydes.

**Faster installation.**

Thanks to its behaviour in temperature changes, previous acclimation to installation is not necessary.

**Ideal for children.**

The floor does not emit any kind of toxic substances.

**Pet friendly.**

The top wear layer protects the floor from pet damages as scratches or blows.

**10 years warranty in commercial use.****20 years warranty in domestic use.**

Plank 225 x 1220 mm

503 **Modena Oak**506 **Red Walnut**603 **Toasted Oak**800 **Nevada Oak**801 **Grey Beach**

Tile 400 x 800 mm

704 **Luxor Medium**



Contact

Adresse : 9,5 km Bd Mohamed VI, Casablanca
Tél. : +(212) 6 65 933 966
Email : nylsolrevetement@gmail.com
www.nylsol.ma

